




CA-02

Cam Adjustment

Installation Instructions

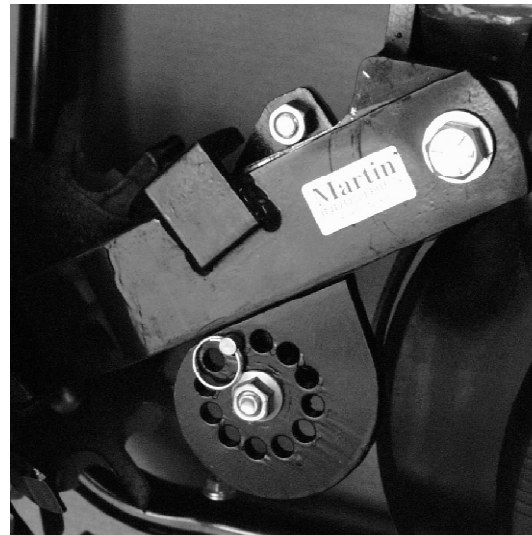

Martin Planter Attachments

Martin Industries LLC

206 Elk Fork Road*Elkton, KY 42220

telephone (270)265-5817


www.martinandcompany.com

e-mail martin@martinandcompany.com

Installation Instructions for CA-02


Remove left hand pivot bolt from C125 Wrap Around Row Cleaner.

Install support bracket on inside with welded spacer block to outside of planter unit using 5/8" x 2 1/2" hex head bolt and thin nyloc nut provided.

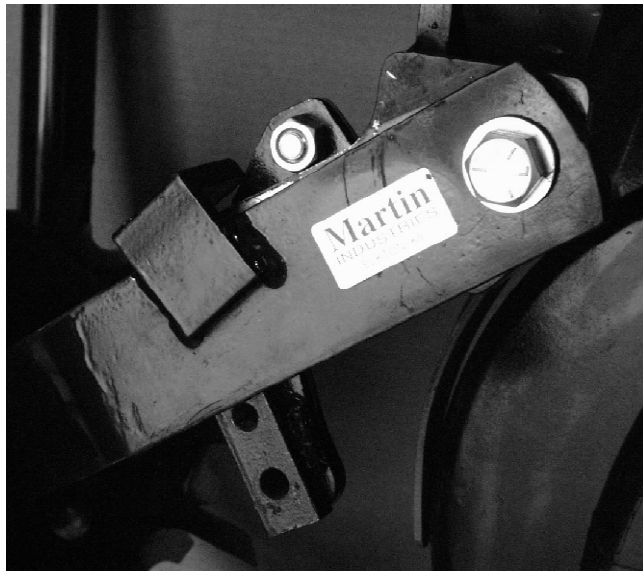

Place 1/2" x 1" hex head bolt provided in top hole of bracket with nut to outside. Hex nut should be resting on row cleaner mounting bracket, as shown.

Install cam to bracket using 1/2" x 2" hex nut with 1/2" flange head lock nut to outside. Long side of cam should be to the rear of planter unit.

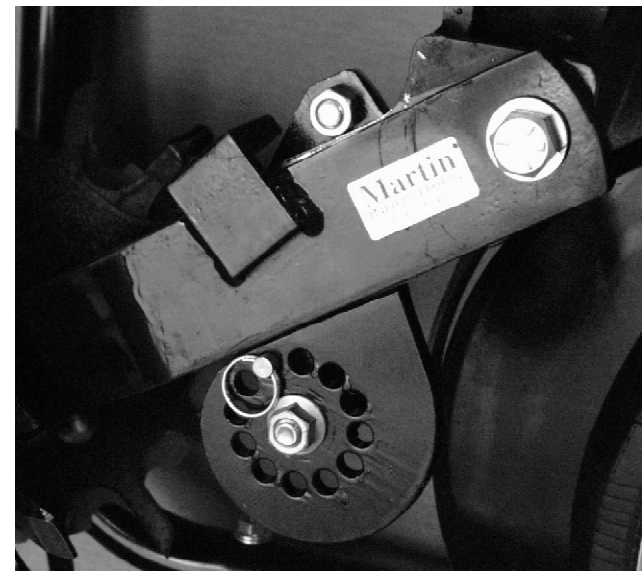

Using 3/4" wrench, rotate cam to achieve desired height. Secure with detent pin.